

Bringing the worlds best chillers to Australia

MODEL:

HUS-EX108

QUICK INFO

Coldest Alfresco Beer Fridge possible is available with this specially designed under zero bar fridge.

You can choose your temperature with a simple touch button control and then you have 2 x special choices to make drinks cold, the TURBO mode gives 1 hr at -5°C and Party Mode runs at -5°C to ensure the coldness in times of extreme need.

Heated glass stops condensation.

PARTS AND ENERGY INFO

- Cyclopentane foaming
- LED lighting
- R600 100% ozone safe gas
- High Quality Chinese Compressor
- High Quality Chinese Bearing Fan
- Chinese Reliable Transformer



SPECIFICATIONS

Capacity (litres)
Holds (cans)
Noise Level
Consumption
Unit dimensions (WxDxH)
Lockable
Gross weight

108 108 45 2.70Kwh/24Hrs 560 x 500 x 845 No 50 kg






^{**}Specifications and price of this product may change at any time

^{**}For more information about this product please call us or visit our website.



PRODUCT INFORMATION

HUS-EX108

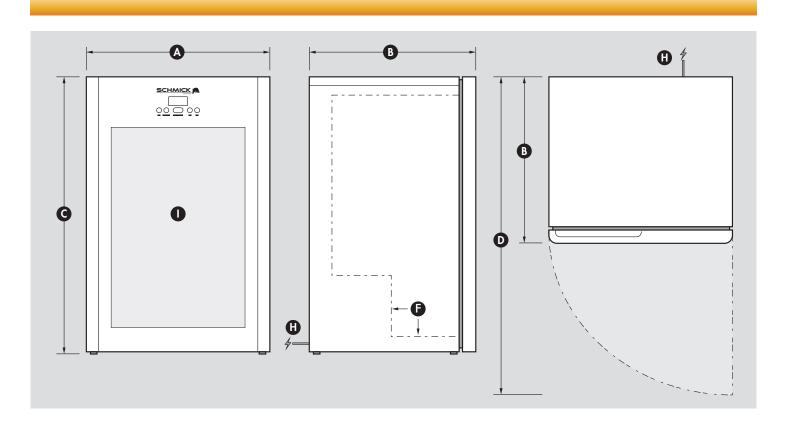

INFORMATION

DIMENSIONS

(A) Overall width 560mm (B) Overall depth 505mm C Overall height - includes feet 850mm Overall depth with door open 1025mm (E) Height of hinge cap (included in height above) N/A 205mm In & 210mm High Internal step inside unit Depth of handle (adds to depth above) N/A (H)1800mm Power cord location & length 445 x 360 x 705mmH Internal dimensions (WxDxH)

OTHER HELPFUL INFORMATION

Height floor to bottom of door

Door size (WxH)

Feet height fully tightened

Height adjustment available on current feet

Change feet size for extra height option

Shelf Qty / Size (WxD)

3 x 460 x 350mmD

1 x 460 x 235mmD

Wine Shelf available (Y/N)

Y

Note: Door opens within diameter of fridge

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) $600 \times 600 \times 870$ mmH Venting type of fridge REAR (Needs Min 20mm around unit & 100mm at rear)

Note: If wanting a 'cabinet door' in front of fridge door please contact us

PERFORMANCE

Cooling Cools To -5oC (Minus 5)
Application suitability Indoor / Alfresco / Outdoor

Maximum operating ambient temperature 38°C
Outdoor IP official rating No