


## PRODUCT INFORMATION

### HUS-SC88-SS

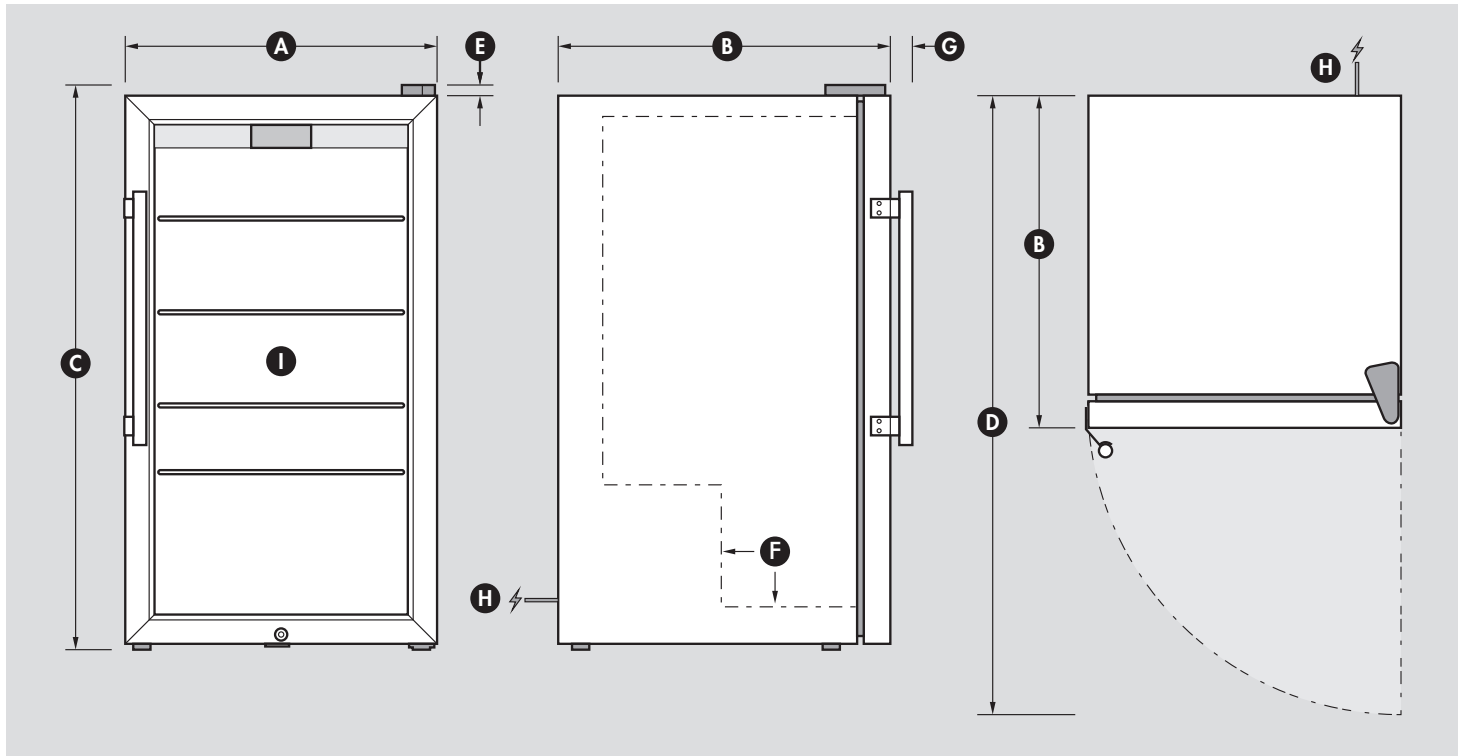

### INFORMATION

#### DIMENSIONS

(A)	Overall width	470mm
(B)	Overall depth	495mm
(C)	Overall height - includes feet	845mm
(D)	Overall depth with door open	935mm
(E)	Height of hinge cap (included in height above)	20mm
(F)	Internal step inside unit	220mm In x 200mm High
(G)	Depth of handle (adds to depth above)	45mm
(H)	Power cord location & length	1800mm
(I)	Internal dimensions (WxDxH)	370 x 370 x 735mmH

Note: Door opens maximum 5mm outside diameter

#### INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH)	510 x 600 x 865mmH
Venting type of fridge	Rear - A vent at rear will help lessen run times

**\*\*Note: If wanting a 'cabinet door' in front of fridge door please contact us\*\***

#### OTHER HELPFUL INFORMATION

Height floor to bottom of door	15mm
Door size (WxH)	470 x 805mmH
Feet height fully tightened	15mm
Height adjustment available on current feet	5mm
Change feet size for extra height option	30mm
Shelf Qty / Size	3 x (390 x 340mmD) & 1 x (390 x 210mmD)
Wine Shelf available (Y/N)	Yes

#### PERFORMANCE

Cooling	Can cool to 2oC easily in up to 38oC Ambient
Application suitability	Indoor or Outdoor Alfresco
Maximum operating ambient temperature	38oC
Outdoor official IP rating	N/A