

Bringing the worlds best chillers to Australia

MODEL: SG1R-SD

QUICK INFO

Rhino all stainless 1 door solid stainless door bar fridge, with brand name parts and designed by the best engineers , built by a quality long term manufacturer, to bring a reliable product to the market.

Polished Stainless Steel Inner, low energy compressor and German energy efficient EBM fans make unit robust for tough conditions as well as extremely energy efficient.



PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- R600 100% ozone safe gas
- Solid Door
- Low Energy Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)

SPECIFICATIONS


Capacity (litres)	129
Holds (cans)	140
Noise Level	47
Consumption	1.05Kwh/24Hrs
Unit dimensions (WxDxH)	600 x 500 x 840
Lockable	Yes
Gross weight	73 kg

**Specifications and price of this product may change at any time

**For more information about this product please call us or visit our website.

PRODUCT INFORMATION

SG1R-SD

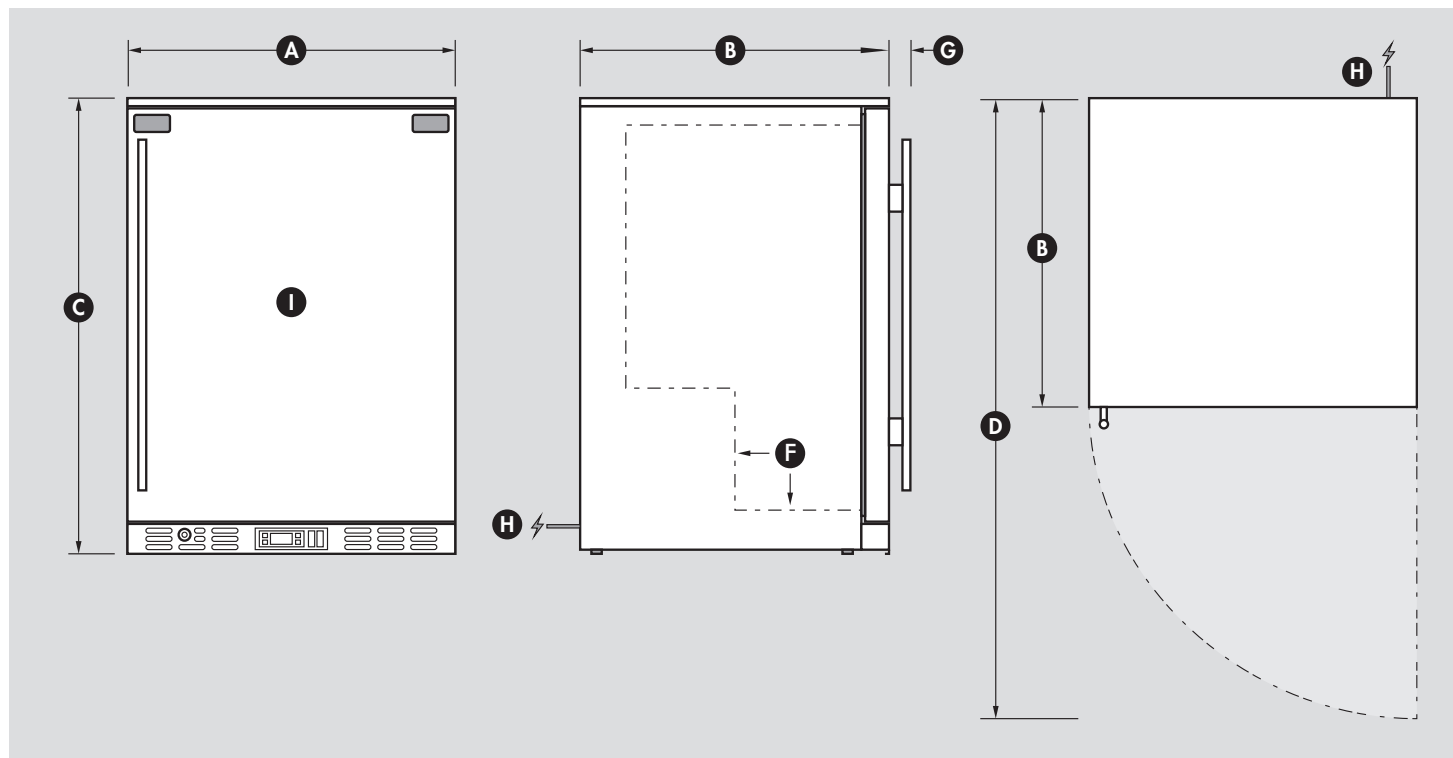

INFORMATION

DIMENSIONS

(A)	Overall width	600mm
(B)	Overall depth	495mm
(C)	Overall height - includes feet	840mm
(D)	Overall depth with door open	1070mm
(E)	Height of hinge cap (included in height above)	N/A
(F)	Internal step inside unit	190mm In & 190mm High
(G)	Depth of handle (adds to depth above)	40mm
(H)	Power cord location & length	1800mm
(I)	Internal dimensions (WxDxH)	520 x 380 x 680mmH

Note: Door opens maximum 5mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 620 x 600 x 850mmH
Venting type of fridge Front Venting, Through Grill

****Note: If wanting a 'cabinet door' in front of fridge door please contact us****

OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	600 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	2 x (500mmW x 350mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)
Application suitability	Commercial / Alfresco / Indoor
Maximum operating ambient temperature	38oC
Outdoor official IP rating	IP22
Meps Energy Approved & Food Grade	Yes