

Bringing the worlds best chillers to Australia

MODEL: SG2H-SD

QUICK INFO

Rhino all stainless solid 2 door bar fridge, with brand name parts and designed by the best engineers , built by a quality long term manufacturer, to bring a reliable product to the market.

Features include LG compressor LOW E glass, lock, self-closing doors, heavy duty shelves and polished stainless steel interior to make unit robust for tough conditions.



PARTS AND ENERGY INFO

- Cyclopentane foaming
- German energy saving EBM fans
- LED lighting
- LOW E glass
- R600 100% ozone safe gas
- LG Compressor
- Meanwell Transformer From Taiwan
- Philips LED Lighting (Same Factory)

SPECIFICATIONS

Capacity (litres) Holds (cans) Noise Level Consumption Unit dimensions (WxDxH) Lockable Gross weight 208 240 44 1.35Kwh/24Hrs 900 x 500 x 840 Yes 87 kg




 $^{\star\,\star}\text{Specifications}$ and price of this product may change at any time

**For more information about this product please call us or visit our website.



PRODUCT INFORMATION

SG2H-SD

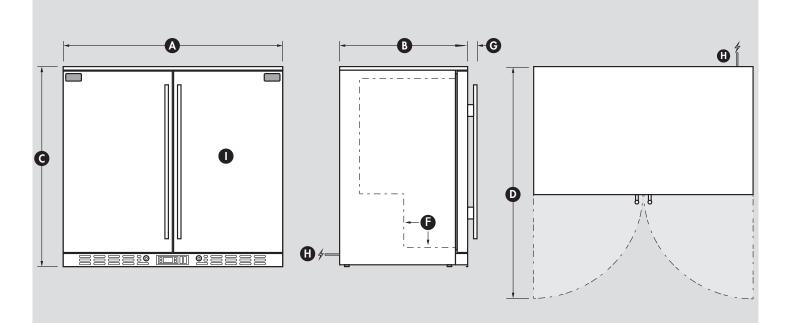

INFORMATION

DIMENSIONS

(A)	Overall width		900mm
B	Overall depth		495mm
Ô	Overall height - includes feet		840mm
\bigcirc	Overall depth with door open		915mm
E	Height of hinge cap (included in	n height above)	N/A
F	Internal step inside unit	190mm In & 190)mm High
G	Depth of handle (adds to depth above)		40mm
(H)	Power cord location & length		1800mm
\bigcirc	Internal dimensions (WxDxH)	820 x 380 x	680mmH

Note: Door opens maximum 5mm outside diameter

INSTALLATION & BUILDING INTO CAVITY'S

Minimum cavity size needed (WxDxH) 920 x 600 x 850mmH Front Venting type of fridge Venting, Through Grill

Note: If wanting a 'cabinet door' in front of fridge door please contact us

OTHER HELPFUL INFORMATION

Height floor to bottom of door	65mm
Door size (WxH)	445 x 755mm
Feet height fully tightened	15mm
Height adjustment available on current feet	10mm
Change feet size for extra height option	30mm
Shelf Qty / Size	4 x (395mmW x 345mmD)
Wine Shelf available (Y/N)	Yes

PERFORMANCE

Cooling	Cools easily to (1oC)
Application suitability	Commercial / Alfresco / Indoor
Maximum operating ambient temper	ature 38oC
Outdoor official IP rating	IP22
Meps Energy Approved & Food Grad	de Yes